

P-902

PVC glove, Seamless Nylon/Glass lining, TPR on the back, Sandy finished, Safety cuff

PRODUCT FEATURES

- Cut level A3/C protection
- TPR on the back for impact protection
- Excellent grip in dry and wet environments
- Water and oil resistance
- Chemical resistance
- Silicone free
- Durable




POSSIBLE APPLICATIONS



PERFORMANCE REQUIREMENTS

EN ISO 21420	PASS
EN 388	4X41C
ANSI Cut Resistant	A3
EN 374-1 Chemical Resistant	Type A (JKLMPT)
Silicone Free	PASS
EN 1186 Food Contact	PASS

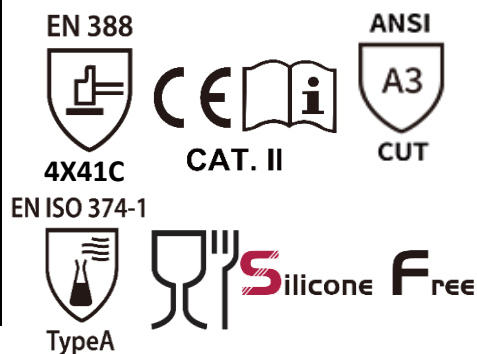

DETAILS

P-902 is a protective glove made from seamless nylon/glass lining and PVC coating with sandy finished. Fully coated with PVC prevents water, oil, and chemicals (40% Sodium Hydroxide, 96% Sulphuric Acid, N-Heptane, 65% Nitric Acid, 30% Hydrogen Peroxide, and 37% Formaldehyde) from penetrating the glove, keeping the user's hand dry and clean. The TPR on the back brings good impact protection. Meanwhile, this glove has a steady performance A3/C cut protection. The glove provides excellent grip in dry and wet environments and is durable. P-902 is widely used in general protection from chemical environments, especially in the crude oil drilling industry.

PRODUCT DESCRIPTIONS	
Series	PVC
Available Size	9-10-11-12
Liner Material	Nylon/Glass
Liner Color Available	Yellow
Coating	Sandy PVC
Coating Color Available	Red (other option are available upon request)
Design	Fully coated, TPR on the back, sandy finished, safety cuff
Thickness	1.8mm on palm
Wash Care	Recommend to use mild detergent or soap and tempered water, avoid using extremely high temperatures when washing and drying (beyond 40°C / 104°F). Wash in a 5-10 minutes cycle time. Rinse in cold water.
Packaging Reference	5 Pairs x 12 Dispensers x 1 Carton 70x42x34cm

SIZE SPECIFICATIONS

Size	9	10	11	12
Total Length (+/-15 mm)	325	325	325	325
Palm Width (+/-5 mm)	110	120	130	143
Weight (+/-5% gram/pair)	285	300	315	330

