



EZK4-320-BIO

SERIES: PaperGuard®

LINER CONTANT: 18G PaperGuard® yarn + TekArmor®

COATING: Bio-EzGrip coating

WEIGHT: 36g / pair (9')

SIZE: 6'~11' (SQG size)



FEATURES

- Soild ANSI| A4 /D cut resistant level
- Incredible 18 gauge with EN abrision level 4
- Excellent breathable and fast dry
- Naturally skin-friendly comfort
- UV protection and antibacterial

STANDARDS AND CERTIFICATIONS

- EN388 : 2016 + A1: 2018 4X41D
- Global Recycled Standard
- OEKO-TEX standard 100
- Machine washable

APPLICATION

- Fine Assembly
- Maintenance
- Mechanicl repair
- Precision work
- Small parts handling




AVAILABLE

- Sanitized® antibacterial treatment
- Plastic-free packaging
- Bio-based packaging

CARE INSTRUCTIONS

Recommend washing gloves in tempered water not exceeding 104° F or 40° C.A mild commercial laundry soap or detergent should be used.Wash in a 5-10 minute cycle time.Rinse in cold water.Tumbler dry at temperature not exceeding 104° F or 40° C.

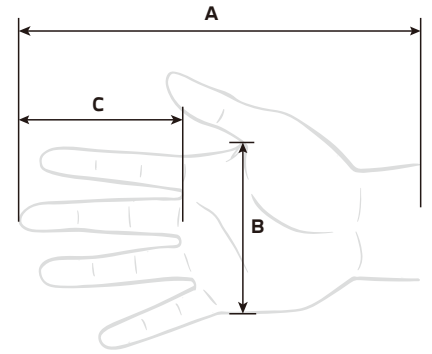

DIMENSIONS

Size Range	6(XS)	7(S)	8(M)	9(L)	10(XL)	11(XXL)
A. Total glove length (+/- 8 mm)	210	220	230	240	250	258
B. Palm width (+/- 5 mm)	82	86	90	97	102	106
C. Middle finger length (+/- 3 mm)	65	72	78	83	85	88
Weight (+/- 3% g / pair)	28	30	32	36	40	42



1. Abrasion resistance(0~4)
2. Coupe test cut resistance (0~5; X= not applicable / not tested)
3. Tear resistance(0~4)
4. Puncture resistance(0~4)
5. Cut resistance-EN ISO 13997(A~F)
6. Impact protection(if applicable)

TYPICAL PERFORMANCE VALUES

EN ISO 21420: General requirements Dexterity		Level 5
EN 388: 2016 + A1: 2018 A. Abrasion Resistance	> 8000 Cycles	Level 4
EN 388: 2016 + A1: 2018 B. Cut Resistance	-	X
EN 388: 2016 + A1: 2018 C. Tear Resistance	> 75 newtons	Level 4
EN 388: 2016 + A1: 2018 D. Puncture Resistance	> 20 newtons	Level 1
EN 388: 2016 + A1: 2018 E. Cut Resistance ISO	≥ 15 Newton	Level D